



ARDON®
WORKWEAR
& OUTDOOR

ARDON® HOBART WELD S3

SAFETY SHOES



DRY AIR



**WATER
REPELLENT**



ZIPPERS

TECHNICAL SHEET



ARDON[®]
WORKWEAR
 & **OUTDOOR**

ARDON[®] HOBART WELD S3

SAFETY SHOES

ARTICLE G3257

MATERIAL

Upper face cowhide leather 1.8-2 mm thick, hydrophobic treatment
 Lining cowhide
 Sole PU/rubber Superline, two-component spray coating, oil resistant, anti-static, antislip, resistant up to 300 °C
 Toe cap glassfiber 522
 Plate kevlar
 Insole ANATOMIC FOAM anatomically shaped EVA foam, supports longitudinal and transverse arches, absorbs shocks in the heel area

SIZE

UNIT

PACKAGE

Units in a carton 10 pairs
 Units in a box 1 pair

DIMENSIONS

41-48
 Carton H x W x D 36,5 x 48 x 65,5
 (cm)
 Carton (cbm) 0,115

Size EUR	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51
Insole length mm	-	-	-	-	-	-	273	279	286	293	303	307	318	323	-	-	-
Foot length cm	-	-	-	-	-	-	26,3	26,9	27,6	28,3	29,3	29,7	30,8	31,3	-	-	-

Safety welding ankle boots with an upper made of high-quality cowhide leather, leather tongue and ankle area, with a hydrophobic finish. For the highest user comfort, the footwear has a lining made of high-quality cowhide leather and is equipped with an anatomically shaped, antistatic, antibacterial, ESD insole. Safety is ensured by a fiberglass toe cap and Kevlar insole. The sole made of PU / rubber material has anti-slip properties SRC and is resistant to contact heat up to 300 ° C. The shoes resist splashes of molten metal. Two fast buckles are used for easy removal and donning, and standard buckles for adjustment to the individual foot width.

TECHNICAL SHEET



ARDON[®]
WORKWEAR
 & **OUTDOOR**

NORMS

(EU) 2016/425

EN ISO 20349:2017

Protective footwear against thermal hazards and splashes of molten metal found in foundries and welding

Category

S3 WG HRO HI CI SRC

Categories	EN ISO 20345	
E - energy absorption in the heel area	✓	
FO - resistance to oils and fuels	✓	
A - antistatic footwear	✓	
SRC - resistance to slipping on ceramic floor tiles with SLS and on steel floors with glycerin	✓	
WR - upper resistant to water	✓	
Safety toe cap for toe protection	✓	
P - resistance to punctures (protective insole)	✓	
SRA - slip resistance ceramic floor tiles with SLS		
HRO - resistance to contact heatup to 300 °C	✓	
HI-insulation of the bottom of the shoe against heat	✓	
CI-insulation of the bottom of the shoe against the cold	✓	
Splatters of molten metal	✓	
ESD – shoe protects against electrostatic discharge and can be used on EPA premises		
The shoes do not contain metal parts		
-		
-		
-		

TECHNICAL SHEET



ARDON®


**WORKWEAR
& OUTDOOR**

CODE	EAN	CARTON WEIGHT (KG)	UNIT WEIGHT (KG)
G3257/41	8592390106698	15.130	1.513
G3257/42	8592390106704	17.005	1.701
G3257/43	8592390106711	17.300	1.730
G3257/44	8592390106728	17.550	1.755
G3257/45	8592390106735	17.800	1.780
G3257/46	8592390106742	18.005	1.801
G3257/47	8592390106759	18.300	1.830
G3257/48	8592390106766	18.550	1.855





ARDON®
WORKWEAR
& OUTDOOR

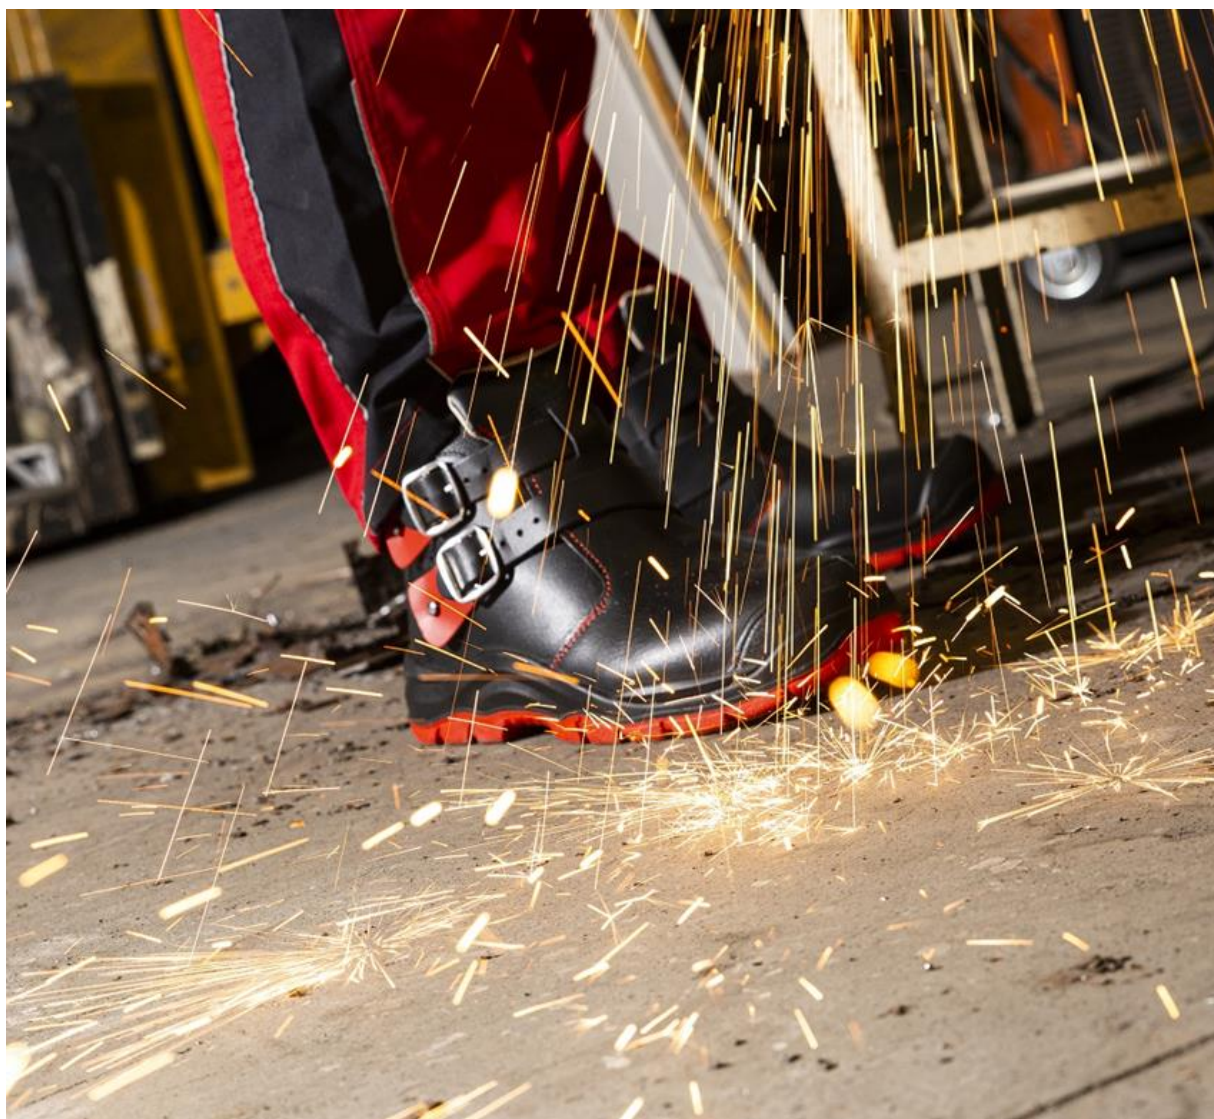



ARDON®

**WORKWEAR
& OUTDOOR**



TECHNICAL SHEET