



**ARDON®**  
**WORKWEAR**  
**& OUTDOOR**

# ARDON® BRICK S3 ESD

SAFETY SHOES



DRY AIR



NONMETALLIC



WATER  
REPELLENT



REFLECTIVE



ESD

TECHNICAL SHEET



**ARDON**<sup>®</sup>  
**WORKWEAR**  
**& OUTDOOR**

# ARDON<sup>®</sup> BRICK S3 ESD

SAFETY SHOES

**ARTICLE** G3394

**MATERIAL**

Upper WOVEN-TEK- highly resistant fabric, hydrophobic  
 Lining MESH laminated breathable fabric  
 Sole PU/rubber, two-component spray coating, oil resistant, anti-static, antislip, resistant up to 300 ° C  
 Toe cap glassfiber  
 Plate kevlar  
 Insole ANATOMIC HI- POLY FOAM – anatomically shaped EVA foam, absorbs shocks in the heel area

**SIZE**  
**UNIT**


38-48  
 pair

**PACKAGE**  
 Units in a carton  
 Units in a box

10 pairs  
 1 pair

**DIMENSIONS**  
 Carton H x W x D (cm)  
 Carton (cbm)

	38-42	43-48	
Carton H x W x D (cm)	64,5x 33,5x 60,5	67x 37,5 x 65,5	
Carton (cbm)	0,1307	0,1646	

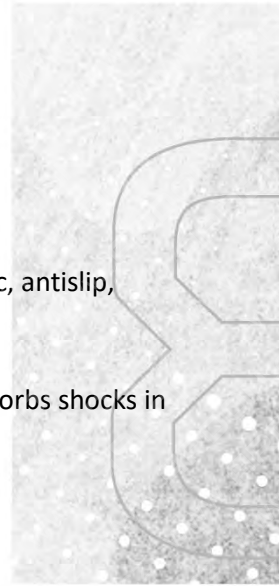

TECHNICAL SHEET

Size EUR	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51
Insole length mm	-	-	-	253	259	266	273	280	287	293	300	306	313	319	-	-	-
Foot length cm	-	-	-	24,3	24,9	25,6	26,3	27	27,7	28,3	29	29,6	30,3	30,9	-	-	-

**DESCRIPTION**

Ankle safety shoes with an upper made of innovative Woven-Tek material. The upper textile is highly abrasion-resistant, water-resistant and has excellent hygienic properties. The shoes are equipped with a sprayed PU/rubber sole, which ensures stability and safety even on challenging terrain. This highly durable model is designed for demanding environments and the toughest work tasks.



**ARDON**<sup>®</sup>  
**WORKWEAR**  
 & **OUTDOOR**

## NORMS

(EU) 2016/425

EN ISO 20345:2022 Personal protective equipment - Safety footwear

Category S3S SR HRO FO HI CI

Categories	EN ISO 20345	
E - energy absorption in the heel area	✓	
FO - resistance to oils and fuels	✓	
A - antistatic footwear	✓	
SRC - resistance to slipping on ceramic floor tiles with SLS and on steel floors with glycerin	✓	
WRU - upper resistant to water	✓	
Safety toe cap for toe protection	✓	
P - resistance to punctures (protective insole)	✓	
HRO - resistance to contact heat up to 300 °C	✓	
HI-insulation of the bottom of the shoe against heat	✓	
CI-insulation of the bottom of the shoe against the cold	✓	
Splatters of molten metal		
ESD – shoe protects against electrostatic discharge and can be used on EPA premises	✓	
The shoes do not contain metal parts	✓	
-		
-		
-		

TECHNICAL SHEET



**ARDON®**

**WORKWEAR  
& OUTDOOR**

<b>CODE</b>	<b>EAN</b>	<b>CARTON WEIGHT (KG)</b>	<b>UNIT WEIGHT (KG)</b>
G3394/38	8592390348104	21.3	2.125
G3394/39	8592390348111	21.4	2.136
G3394/40	8592390348128	21.4	2.142
G3394/41	8592390348135	21.5	2.148
G3394/42	8592390348142	21.5	2.153
G3394/43	8592390348159	21.6	2.159
G3394/44	8592390348166	21.6	2.161
G3394/45	8592390348173	21.7	2.168
G3394/46	8592390348180	21.8	2.175
G3394/47	8592390348197	21.9	2.186
G3394/48	8592390348203	22.0	2.196



**ARDON®**  
**WORKWEAR**  
**& OUTDOOR**





**ARDON®**

**WORKWEAR  
& OUTDOOR**



TECHNICAL SHEET